

EMERGENCY OUTDOOR PANEL


AV-02 FDR/IDE

EAN: 5060514912577 (AV-02FDR)
EAN: 5060514912621 (AV-02IDE)

The mechanical button of this call panel has an almost unlimited resource of presses.

This individual calling panel is very different for the best design and features from ordinary panels installed in homes and apartments.


Due to the IP65 protection level, this panel can be installed without any problems on the street without fear of heavy rain or dust.

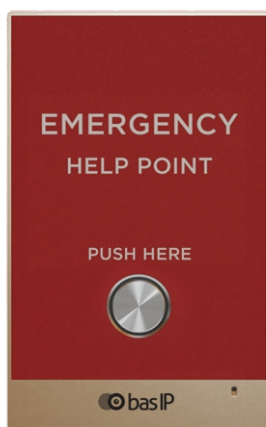

AV-02FDR



AV-02IDE

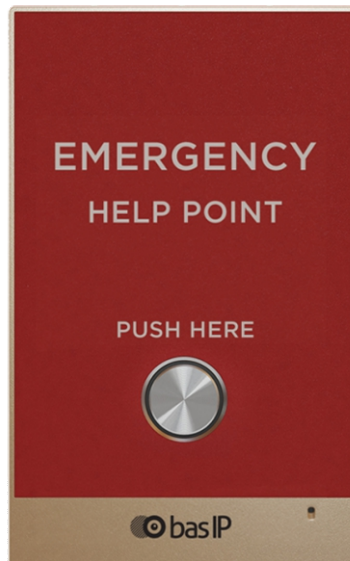

Functional capabilities

- Interface: Multi-language graphical and WEB interface.
- Opening the lock:
 - From the monitor.
 - From the BAS-IP Intercom application.
- Shortcut buttons: mechanical button.
- Number of call melodies: 4 polyphonic melodies.
- Authentication:
 - Separate password for settings.
 - WEB - interface.
- Talk mode: Duplex.
- Optional:
 - SIP P2P.
 - Built-in Relay.

General characteristics

- Panel Type: Individual.
- Protection class: IP65.
- Temperature range: -40 - +65 ° C.
- Power consumption: 6.5 W, standby 2.5 W.
- Power supply: + 12 Volt, PoE.
- Body: Metal.
- Color solution: Green, red.
- Size for installation: 94 × 151 × 60 mm.
- The size of the panel itself: 99 × 159 × 48 mm.
- Installation Type: Flush, surface with BR-AV2.